

# BASIC SUPERFLAT SUSPENDED | G7/P7



**DE** LED-Pendelleuchte. Direkt-indirekt oder rein direktstrahlend. Gestuftes Leuchtenkörper aus Aluminiumprofil mit lediglich 18mm sichtbarem Rahmenprofil. Oberfläche weiß, silber, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Stufenlos höhenverstellbare Zentral-Seilabhangung mit transparent ummantelter Zuleitung oder Pendelrohrabhangung. Auf Anfrage: Integration von Notlichtkomponenten, Sensortechnologie.

**EN** LED pendant luminaire. Direct-indirect or direct-only light distribution. Tiered luminaire body made of aluminium profile with only 18mm visible frame. Surface white, silver, graphite, black, champagne or copper coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial  $\leq$  MacAdam 3. Colour rendering CRI>80 or CRI>90. Height-adjustable central cord suspension with transparent power supply cable or rod suspension. On request: Integration of emergency lighting components, sensor technology.

**FR** Luminaire LED suspendu. clairage direct/indirect ou seulement direct. Corps du luminaire tag en profil aluminium avec cadre visible de seulement 18mm. Surface laque blanc, argent, graphite, noir, champagne ou cuivre. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Diffuseur microprismatique optimis pour un blouissement limit et adapt aux bureaux. Diffuseur opale satin pour un clairage gnral et une transmission maximale et homogne. Driver intgr dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim, Casambi). Temprature de couleur 2200K, 2700K, 3000K, 3500K, 4000K ou 6500K. Binning initial  $\leq$  Mac Adam 3. Rendu de couleur CRI>80 ou CRI>90. Suspension centrale  filins rglables par tendeur rapide avec cble d'alimentation transparent ou suspension rigide tubulaire. Sur demande: Intgration de composants d'clairage de secours ou de capteurs.




**PRODUCT-CODE:** **B P7 A S D - 8 30 M - D300 - U**

PRODUCT FAMILY	- B Basic
TYPE	- P7 Direct-Indirect, G7 Direct-Only
OPTICAL SYSTEM	- A Microprismatic, O Opal
SURFACE FINISH	- W Snow White, V Ivory White, S Radiant Silver, U Urban Graphite, B Jet Black, H Champagne Silver, K Satin Copper
CONTROL GEAR	- E On/Off, L DALI, D 1-10V, H Touch-Dim, C Casambi
COLOUR REND.	- 8 CRI>80, 9 CRI>90
COLOUR TEMP.	- 22 2200K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, 65 6500K
POWER	- M Medium Power, H High Power
SIZE	- Luminaire Diameter in mm: D300, D400, D500, D600, D800
SUSPENSION	- U Central Cord Suspension, P Tube Suspension [min. D400]
ON REQUEST	- Multisensor, Radar Sensor, Emergency Module, Cable Colour: Black, Red




MICROPRISMATIC / DIRECT-INDIRECT



UGR $\leq$ 19 (X=4H, Y=8H, S=0.25H)  
DIRECT: ca.50% INDIRECT ca.50%

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
300	1470lm/11W	2490lm/19W
400	3160lm/23W	5060lm/37W
500	4170lm/29W	6890lm/49W
600	6040lm/41W	9640lm/68W
800	11310lm/78W	14940lm/110W


MICROPRISMATIC / DIRECT



UGR $\leq$ 19 for Medium Power (X=4H, Y=8H, S=0.25H)  
DIRECT: 100%

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
300	770lm/7W	1320lm/11W
400	1630lm/12W	2670lm/19W
500	2370lm/16W	3970lm/28W
600	3770lm/25W	6130lm/42W
800	5900lm/40W	7920lm/54W


OPAL DIFFUSER / DIRECT-INDIRECT



DIRECT: ca.50% INDIRECT ca.50%

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
300	1480lm/11W	2500lm/19W
400	3180lm/23W	5090lm/37W
500	4210lm/29W	6950lm/49W
600	6110lm/41W	9750lm/68W
800	11450lm/78W	15120lm/110W


OPAL DIFFUSER / DIRECT



DIRECT: 100%

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
300	780lm/7W	1330lm/11W
400	1650lm/12W	2700lm/19W
500	2410lm/16W	4030lm/28W
600	3840lm/25W	6240lm/42W
800	6040lm/40W	8100lm/54W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

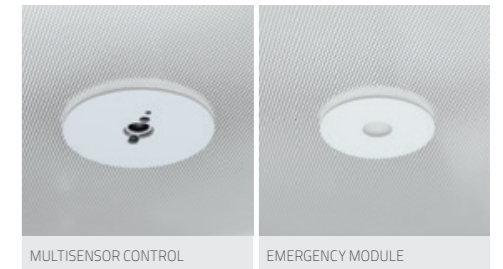

MULTISENSOR CONTROL

EMERGENCY MODULE



SNOW WHITE

RADIANT SILVER

URBAN GRAPHITE

JET BLACK

CHAMPAGNE SILVER

SATIN COPPER