

Basic Ambient A6 | Surface



DE LED-Anbauleuchte oder Deckenmontage. Direkt-rundumstrahlend für dezente Deckenaufhellung. Leuchtenkörper aus Aluminiumprofil und Difusor mit 60mm Bauhöhe. Ambientdiffusor aus satinierem Acrylglas für Allgemeinbeleuchtung. Oberfläche weiß, silber, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial \leq MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Auf Anfrage: Integration von Notlichtkomponenten, Sensortechnologie.


EN LED surface-mounted luminaire for ceilings. Omnidirectional light distribution for discreet illumination of the ceiling. Luminaire body made of aluminium profile and diffuser with overall height of 60mm. Ambient diffuser made of frosted acrylic glass for general lighting. Surface white, silver, graphite, black, champagne or copper coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Converter integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial \leq MacAdam 3. Colour rendering CRI>80 or CRI>90. On request: Integration of emergency lighting components, sensor technology.

BA6 F SE-8 40 M-D400

Product Family	B: Basic
Type	A6: Direct only
Optical System	F: Ambient Diffuser
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, U: Urban Graphite, B: Jet Black, H: Anodic Champagne, K: Satin Copper
Control Gear	E: On/Off, L: DALI, H: Touch-Dim, C: Casambi, 6: DALI DT6 for TW, 8: DALI DT8 for TW
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K [D400-D600]
Power	M: Medium Power, H: High Power
Size	Luminaire Diameter in mm: D300, D400, D500, D600
On Request	Radar Sensor, Emergency Module [D400-D600]




Ambient Diffuser | Direct only



D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
300	960lm/7W	1870lm/13W
400	1850lm/13W	3630lm/27W
500	2450lm/17W	4810lm/34W
600	3910lm/26W	7240lm/50W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

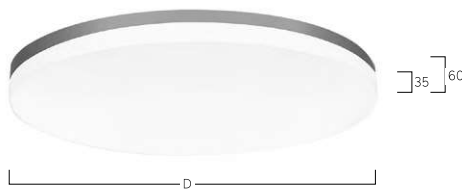

W Snow White



S Radiant Silver



U Urban Graphite



B Jet Black



H Anodic Champagne



K Satin Copper