


SKADI SM.



STANDING OUT IN EVERY WAY.

If a ceiling is not suitable for recessed installation, it's time for Skadi SM. The surfaced version is a great solution for each concrete ceiling, and is often chosen for the illumination of corridors or in-between spaces. Combine Skadi SM with the track and suspended version.

SKADI 160 SM.

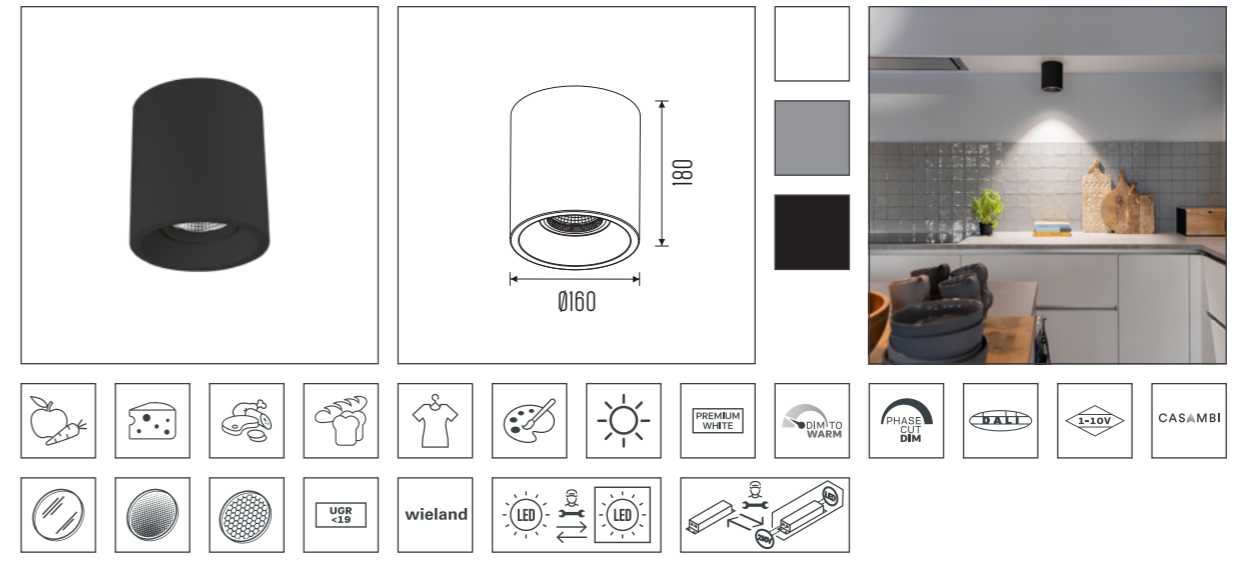


CCT	: 2700K - 5700K	Optic	: Facet anodized aluminum reflector 15°, 30°, 45°, 55°
CRI	: (RA) >90, (RA) >97, (RA) >80	Mains voltage	: 220-240V / 50-60Hz
Chromaticity tolerance	: 3	Max. ambient temperature	: 35°C
Luminous flux	: max. 2500Lm	Ingress protection	: IP20
Connected load	: max. 18.5W	Net. weight	: 1.20Kg
System efficiency	: max. 137Lm/W	Warranty	: 5 years
Electrical Safety Class	: Class I		

[Go to full specs](#)



SKADI 220 SM.

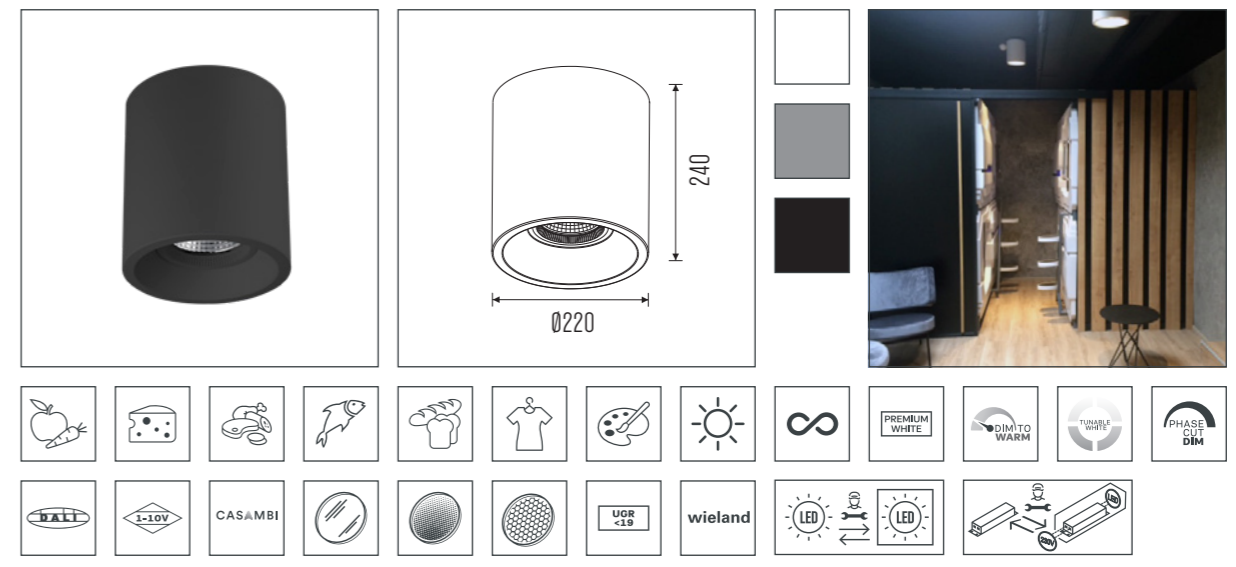

CCT	: 2700K - 5700K	Optic	: Facet anodized aluminum reflector 15°, 30°, 45°, 60°
CRI	: (RA) >90, (RA) >97, (RA) >80	Mains voltage	: 220-240V / 50-60Hz
Chromaticity tolerance	: 3	Max. ambient temperature	: 35°C
Luminous flux	: max. 4500Lm	Ingress protection	: IP20
Connected load	: max. 38.5W	Net. weight	: 1.70Kg
System efficiency	: max. 137Lm/W	Warranty	: 5 years
Electrical Safety Class	: Class I		

[Go to full specs](#)

