


SANA.



TURN AND TILT.

This banana spotlight can be integrated in any retail setting or showroom, thanks to its flexibility in terms of rotation and tilting. The luminaire can be used as a downlight above neutral areas, and also as a spot above exhibited objects. This gives you the freedom to adjust the Sana according to your specific requirements.

SANA.

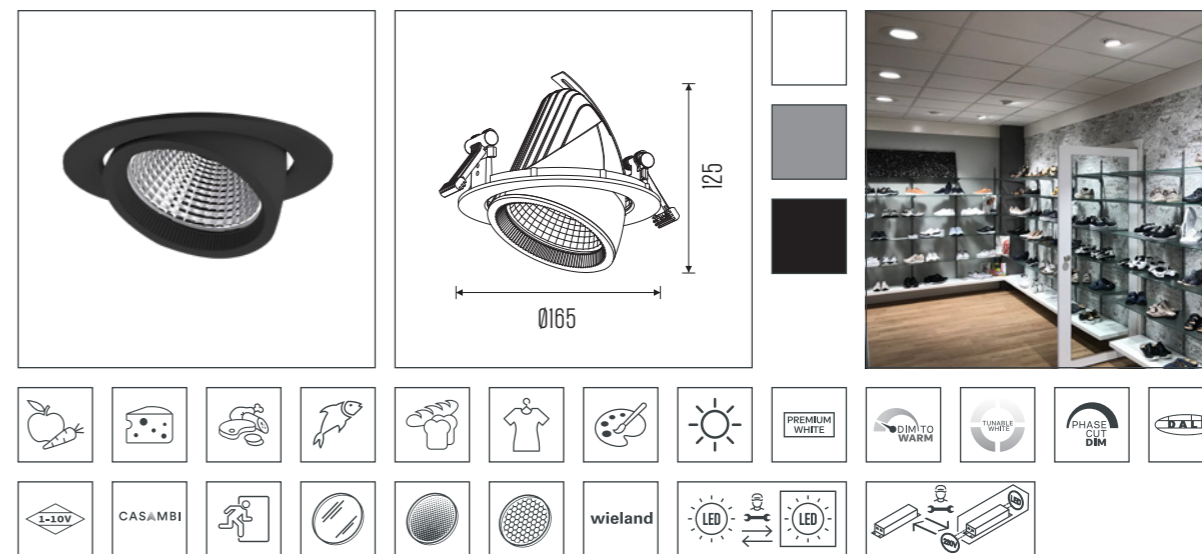


Adjustability	: 350° rotational and 50° tiltable	Electrical Safety Class	: Class II
Cut-out	: Ø 155mm	Optic	: Facet anodized aluminum reflector 15°, 30°, 45°, 60°
CCT	: 2700K - 5700K	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90, (RA) >97, (RA) >80	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 3	Ingress protection	: IP20
Luminous flux	: max. 4500Lm	Net. weight	: 0.88Kg
Connected load	: max. 38.5W	Warranty	: 5 years
System efficiency	: max. 137Lm/W		

Go to full specs



SANA HE.

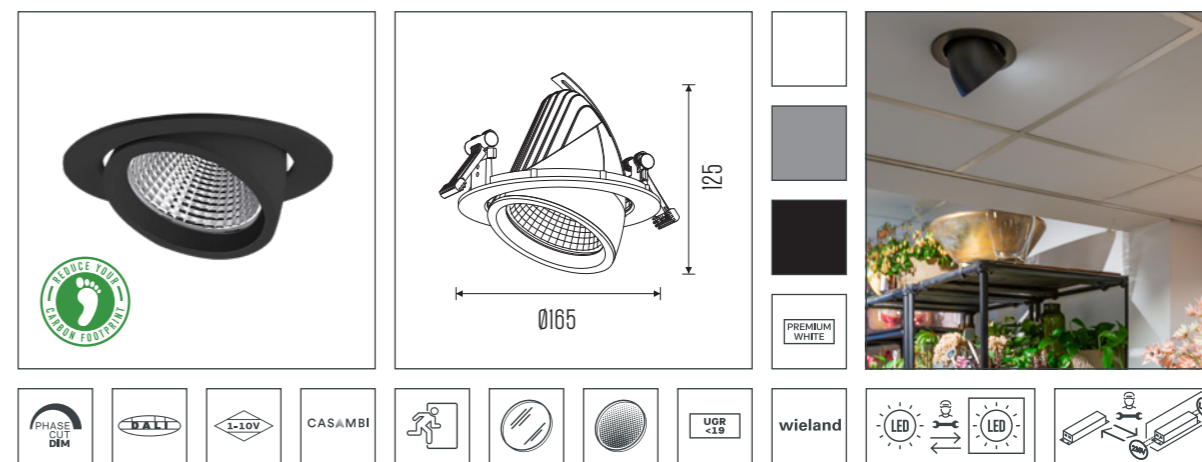

Adjustability	: 350° rotational and 50° tiltable	Electrical Safety Class	: Class II
Cut-out	: Ø 155mm	Optic	: Facet metalized reflector 20°, 30°, 40°, 60°
CCT	: 2700K, 3000K, 4000K, 3000K PW, 3500K PW, 4000K PW	Mains voltage	: 220-240V / 50-60Hz
CRI	: (RA) >90	Max. ambient temperature	: 35°C
Chromaticity tolerance	: 2	Ingress protection	: IP20
Luminous flux	: max. 5200Lm	Net. weight	: 0.88Kg
Connected load	: max. 40W	Warranty	: 5 years
System efficiency	: max. 147Lm/W		

Go to full specs

